

IDS ELITE


Designed for traffic signals, street lighting and ducting applications

Features


- Cover and frame is EN 124:2015 compliant
- Composite cover in a galvanised steel frame
- Corrosion resistant even in the most aggressive environments
- No resale value to the scrap market
- No signal interference with wireless communication devices
- Non-conductive of stray voltage or heat
- Coarse skid resistant upper surface featuring the trademarked 4L non slip pattern
- UV resistant protective surface layer
- Badged Traffic Signals Street Lighting as standard
- Blank covers available



Cover available in any RAL colour

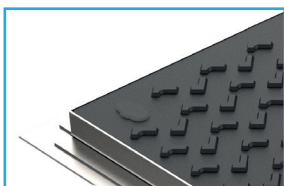

Closed keyways preventing dirt and debris entering the chamber

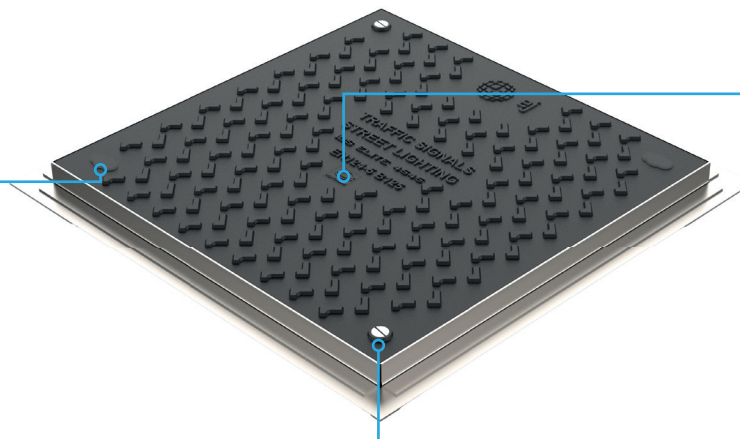

Third party certification to EN 124-5:2015 by the NSAI



Cover and frames are compatible with our DATUM range of chambers



Durable stainless steel locking screw for harsh environments

Bespoke locking bolts available to provide increased security on critical networks

Product reference	Class	Product code	Clear opening (mm)	Overall dimensions (mm)	Frame height (mm)	Total weight (kg)
IDS ELITE 3030	B125	721006	300 x 300	378 x 363	27	5
IDS ELITE 3045	B125	721007	300 x 450	385 x 536	27	8
IDS ELITE 4545	B125	721008	450 x 450	536 x 536	27	10
IDS ELITE 6045	B125	721009	600 x 450	684 x 536	27	12
IDS ELITE 6060	B125	721010	600 x 600	684 x 684	27	15