



ireland.sales@ejco.com

[Learn more about us](#)

FLUSH FIT B125

Flush Fit hinged assisted access cover
Certified by the National Standards Authority
of Ireland (NSAI) to EN124-3




GULLY TOPS and
MANHOLE TOPS
I.S. EN 124-3:2015

NSAI Certified

FEATURES

- Hinged and Assisted Cover
- One Person Operation (Cover Lifting <25 kg)
- EPDM Seal to Prevent Odour Escape
- Cover and Frame are Fully Certified EN124-3
- Cover surface Complies to PSRV
- Axis and bolts in Stainless Steel
- Springs in Stainless Steel Grade 304/316
- Material: Mild Steel to S275 JR - NF EN 10025
- Hot Dip Galvanization According to NF EN ISO 1461
- Average Thickness of Galvanisation = 70µm





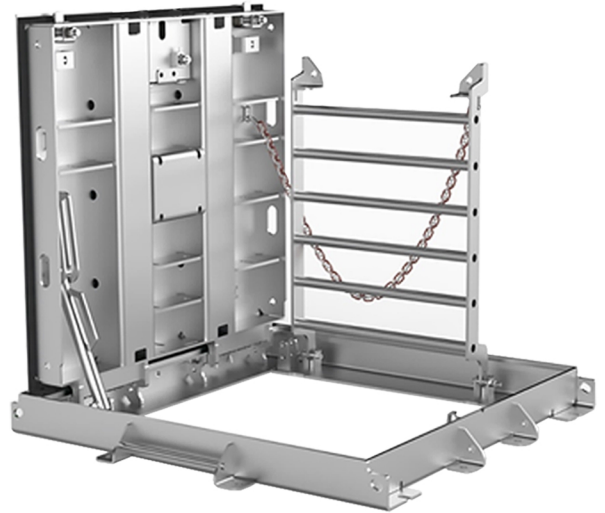


SAFETY GRIDS

- Resistance 300kg and meet BS9124 Drop Test
- Maximum 100mm Spacing
- 90° Opening with Auto-Locking
- Chain connected to Safety Grid for Ease of Opening

PLACE OF INSTALLATION

- A15 - Group 1 - Footways, pedestrian and cycle areas.
- B125 - Group 2 - Footways, pedestrian areas, car parks
- C250 - Group 3 - Slow moving, occasionally trafficked areas, parking areas
- D400 - Group 4 - Carriageways of roads (including pedestrian streets), hard shoulders and parking areas for all types of road vehicles

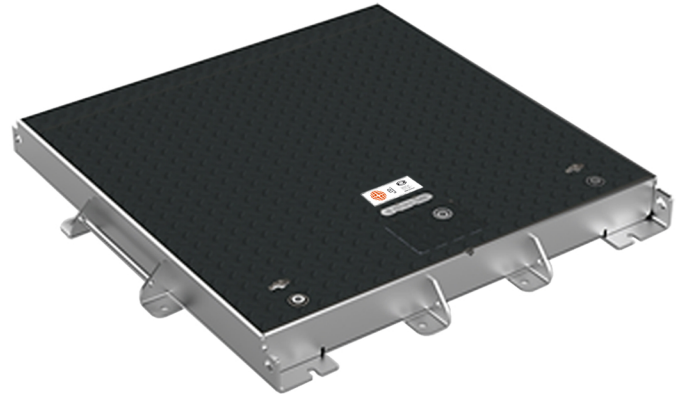

OPERATIONAL VIDEO

For further available sizing, please contact ireland.sales@ejco.com