



NEW

IDS[®] ELITE

Fully Certified to EN 124-5:2015
Industry leading composite covers

EJ are leading the way with the first, independently certified composite access cover to the **EN 124-5:2015** standard.

These anti-slip composite covers feature a galvanised steel frame and are fully designed and tested to EN 124-5:2015 B125. They are also compatible with both the DATUM[™] and NEXUS[™] chambers and are badged TRAFFIC SIGNALS and STREET LIGHTING as standard.

The IDS[®] ELITE range of composite access covers offer exceptional solutions for the most challenging environments. They are corrosion resistant with good ergonomic handling and are a theft deterrent, assuring peace of mind to utility owners and local authorities.


Explore the IDS[®] ELITE range today

Key Features of the IDS® ELITE Range - EN124-5:2015

ejco.com

- Barcol hardness is >35.
- Water absorption is <0.3%.
- Fuel resistance is <0.5%.
- USRV is >63 - featuring the trademarked 4L non-slip pattern.
- Reduction in tensile modulus is <50% after UV weathering test.
- Will withstand 10,000 fatigue cycles without delaminating.
- Will not crack or delaminate after impacting with 3.75kg striker from 2m height.
- Will hold the test load after conditioning to 150°C for 1 hour.
- Low cover weight, easy to handle and install - 60% lighter than traditional composite covers.

NB. 600 x 600 nominal size cover <10kgs

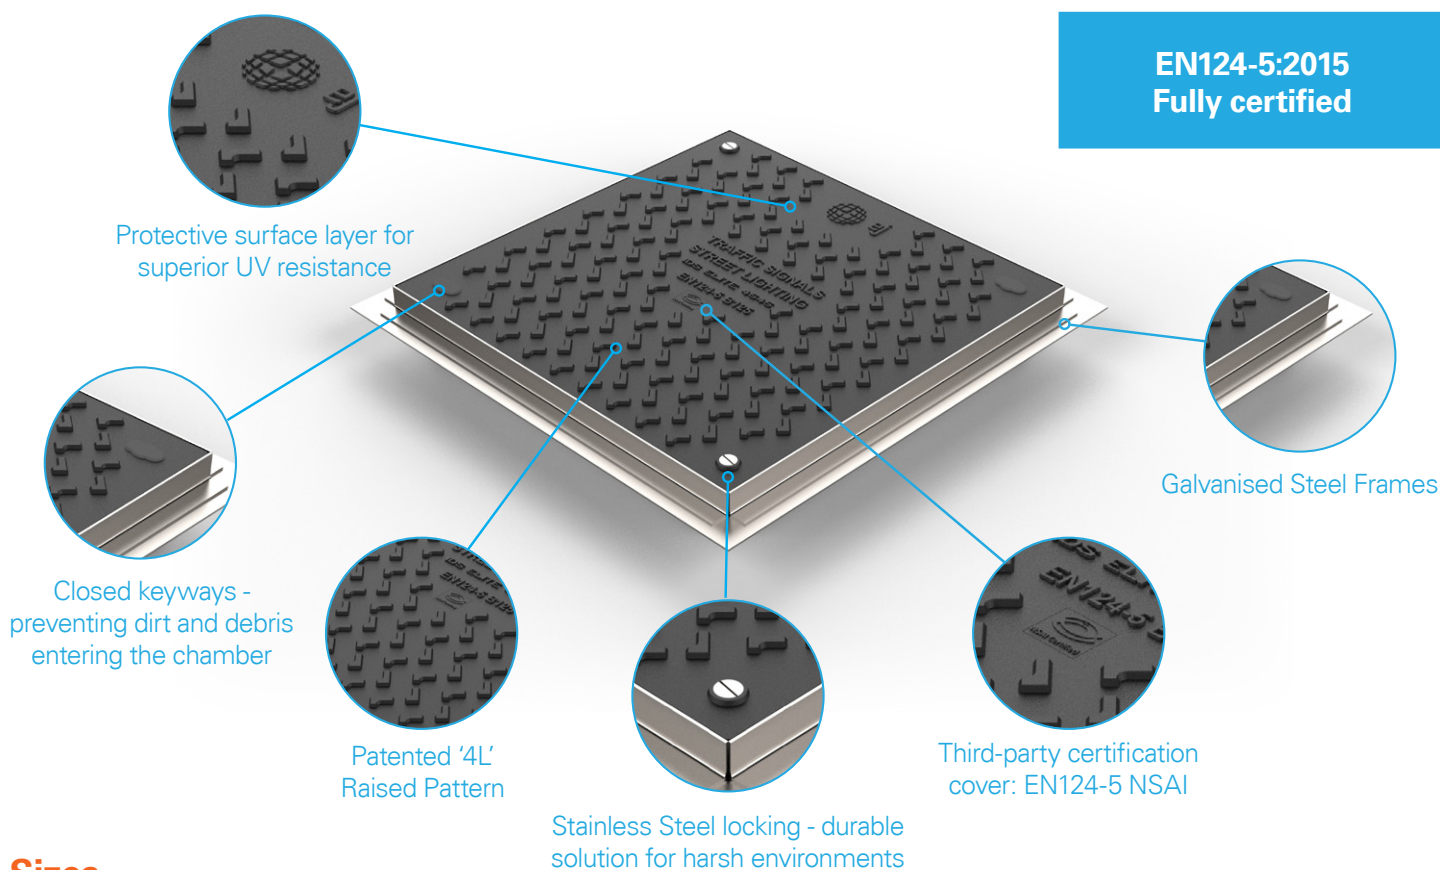

Sizes

Product	Code	Nominal Size (mm)	Covers	Loading	Weight (Kg)
IDS ELITE 3030B	CSF3030EN	300 x 300	1	B 125	6
IDS ELITE 3045B	CSF3045EN	300 x 450	1	B 125	9
IDS ELITE 4545B	CSF4545EN	450 x 450	1	B 125	11
IDS ELITE 4560B	CSF4560EN	450 x 600	1	B 125	13
IDS ELITE 6060B	CSF6060EN	600 x 600	1	B 125	16
IDS ELITE 9045B	CSF9045EN	900 x 450	2	B 125	45
IDS ELITE 9060B	CSF9060EN	900 x 600	2	B 125	53
IDS ELITE 9090B	CSF9090EN	900 x 900	4	B 125	78
IDS ELITE 12060B	CSF12060EN	1200 x 600	2	B 125	62
IDS ELITE 12090B	CSF12090EN	1200 x 900	4	B 125	93

tel +44 (0) 24 7664 1777
tel +44 (0) 1924 258 381
uk.sales@ejco.com

